

Enjoy it.



Built-in appliances


nikpol




Perfectly integrated

Those opting for a modern, state-of-the-art kitchen expect not only appliances that meet the latest technical standards, but also a harmonious overall impression that perfectly combines technology and design. Blaupunkt products offer precisely that.

Worlds of Blaupunkt

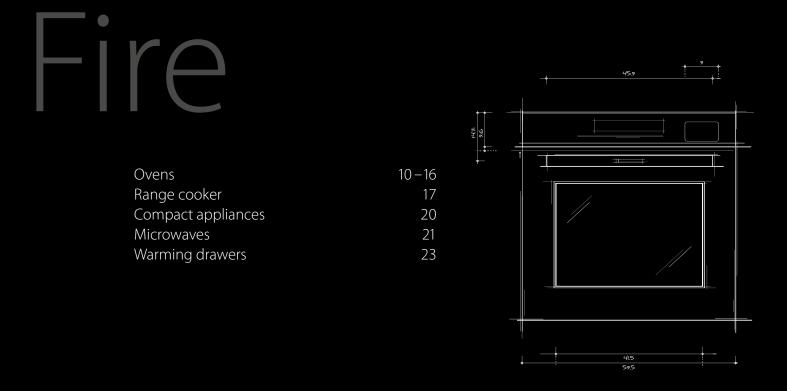




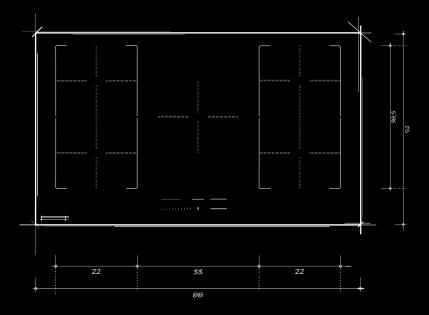


| Hobs | 26-31 |
|-------------------------|-------|
| Gas hobs | 34-35 |
| Hob with extractor fan | 39 |
| Blaupunkt Multi Control | 40-41 |



| Ceiling fans | 42 |
|--------------|-------|
| Wall hoods | 42-43 |
| Flat hoods | 44 |
| Fan module | 45-47 |
| ranmodule | 40 47 |

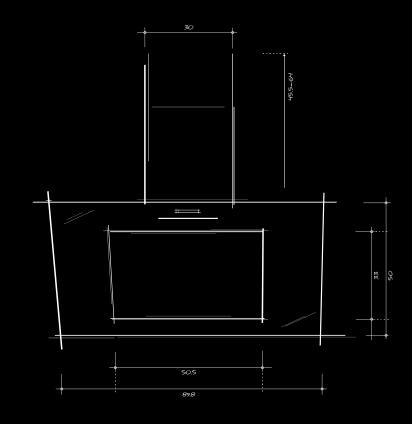

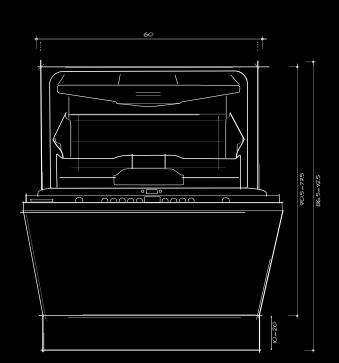



| Dishwasher, 60 cm, partially integrated | 50 |
|-----------------------------------------|----|
| Dishwasher, 60 cm, fully integrated | 50 |
| Dishwasher, 60 cm, free-standing | 51 |

Blaupunkt Additional accessories54–57Technical Drawings60–63

Blaupunkt ovens – the heart of your kitchen

Crispy, delicate and fresh – all available with a simple touch! Intuitive operating concepts and clearly arranged display solutions allow your oven to produce perfect results. And when the feast is over, these practical kitchen appliances simply clean themselves.



Smart slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart Slider.



Touch Control

Precise, innovative and very user-friendly: gently touching the Touch Control buttons is enough to select the desired setting.



Automatic programmes

One touch away from the perfect result: our automatic programmes are equipped for nearly every ingredient. Cooking can't get any easier.



Soft moving

Thanks to its advanced dampers and hinges, the oven door can be opened and closed smoothly. Just a light pull/push and the door opens or closes gently.



Pyrolysis

With a simple touch, all residues from baking, frying and grilling at high temperatures are reduced to ashes that can be simply wiped away with a cloth.



Hydrolysis

Easy cleaning at the push of a button: With the aid of heat and steam, even strong stains can be dissolved.



Aesthetic and modern: The new oven series from Blaupunkt

FIAINI®

BLAU



A uniform look for all your kitchen appliances? With the new Dark Steel oven series, this wish has become reality. The Dark Steel series presents itself in a coherent and consistent design. Equipped with the latest technical innovations, these ovens feature an elegant look that can be perfectly combined with your modern kitchen.

Experience the Dark Steel series in moving pictures now. Simply scan the QR code and watch the video.



9

Ovens

Built-in oven







Output, consumptior

- Voltage: 220 240 V
- Total connected load: 3.2 kW

Oven type, heating type

Built-in electric oven with 11 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process

Design, comfort

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Electronic temperature regulation from 30 °C 250 °C
- Pyrolytic self-cleaning
- Full glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

Dimensions H × W × D

- Appliance dimensions: $59.5 \times 59.5 \times 56.5$ cm
- Installation dimensions: $60.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm

Built-in oven





Output, consumptio

- Voltage: 220 240 V
- Total connected load: 2.9 kW

Oven type, heating type

Built-in electric oven with 11 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process

Design, comfort

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Quick heating
- Temperature recommendation
- Electronic temperature regulation from 30°C 250°C
- Full glass inner door
- Soft-moving door
- Dark Steel metal handle with logo
- Cooking chamber volume 721
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

Dimensions H × W × D

- Appliance dimensions: $59.5 \times 59.5 \times 56.5$ cm
- Installation dimensions: $60.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm







Blaupunkt – perfectly planned

Clear design – right down the line

Everything in one line, that was our goal when developing the new Blaupunkt Dark Steel series. The appliances are carefully aligned to create you a comfortable kitchen space. Ovens and compact appliances can be combined in various ways – along clear, uniform lines of design with black glass and white displays.

- ----- New look in Dark Steel
- ----- Logo now on the handle
- ----- Black glass for uniform, timeless design
- ------ White display with Smart Slider
- —— Optimally aligned and ideally combinable



Ovens

Built-in oven



| 8 | All-glass inside door |
|------------------|--------------------------|
| Hotair | All-glass inside doo |
| Telescopic bar | Pvrolvtic |
| (150°C) | |
| Distant disatory | |

Hot

- Voltage: 220 240 V
- Total connected load: 3.2 kW

Built-in electric oven with 8 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Fully retractable control knob
- Digital display
- Electronic clock
- Quick heating
- Temperature recommendation
- Pyrolytic self-cleaning
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Child protection, door lock in pyrolysis mode
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Appliance dimensions: $59.5 \times 59.5 \times 57.5$ cm
- Installation dimensions: $59.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm

Built-in oven



| Rot air | All-glass inside door |
|--------------|--------------------------|
| | (150°C) |
| lesconic bar | Digital display |

- Voltage: 220 240 V
- Total connected load: 3.0 kW

Built-in electric oven with 8 heating types:

- Top / bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Hot air grill
- Vario large area grill
- Vario small area grill
- Defrost function

- Fully retractable control knob
- Digital display
- Electronic clock
- Quick heating
- Temperature recommendation
- Full glass inner door
- Metal handle
- Cooking chamber volume 701
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Safety switch-off
- Cooling fan
- Large oven interior with 1-way telescopic extension

- Appliance dimensions: 59.5 × 59.5 × 57.5 cm
- Installation dimensions: $59.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm





Built-in oven



• Voltage: 220 – 240 V

- Total connected load: 2.1 kW

- Built-in electric oven with 5 heating types:
- Hot Air Grill
- Grill with fan
- Defrosting
- ECO

- Temperature regulation from 50°C-250°C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 701
 Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- **Dimensions H × W × D** Appliance dimensions: 59.5 × 59.5 × 57.5 cm
- Installation dimensions: $60.0 \times 57.0 \times 56.0$ cm
- Panel height: 120 mm

Built-in oven



- Voltage: 220 240 V
- Total connected load: 2.1 kW

- Built-in electric oven with 4 heating types:
- Top heat

All-glass

- Bottom heat
- Top and bottom heat
- ECO

- Temperature regulation from 50°C 250°C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 751
- Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Appliance dimensions: $59.5 \times 59.5 \times 57.5$ cm
- Installation dimensions: 60.0 × 57.0 × 56.0 cm
- Panel height: 120 mm





Ovens

Built-in oven Built-in oven 5BC 94190AU (150°C) 490► 0



(90)

0

0

0

- Voltage: 220 240 V
- Total connected load: 2.8 kW

- Built-in electric oven with 9 heating types:
- Conventional
- Grill
- Double grill
- Double grill with fan
- Bottom heat
- Conventional with fan
- Hot air
- Defrost
- ECO

- Mechanical control
- Fully retractable control knob
- Temperature regulation from 50°C-250°C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 931
- Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Appliance dimensions: $90.0 \times 54.5 \times 48.0$ cm
- Installation dimensions: 47.5 47.7 × 86.0 × 55.0 56.0 cm

- Voltage: 220 240 V
- Total connected load: 2.8 kW

- Built-in electric oven with 9 heating types:
- Conventional
- Grill
- Double grill
- Double grill with fan
- Bottom heat
- Conventional with fan
- Hot air
- Defrost
- ECO

- Design, comfort Mechanical control with digital timer
- Fully retractable control knob
- Temperature regulation from 50°C 250°C
- Full glass inner door
- Low window temperature
- Cooking chamber volume 931
- Smooth oven walls with suspended grates
- Metal handle
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- Oven lighting
- Cooling fan
- Control lamp for operation condition

- Appliance dimensions: $90.0 \times 54.5 \times 48.0$ cm
- Installation dimensions: 47.5 47.7 × 86.0 × 55.0 56.0 cm





Range Cooker





• Voltage: 220 – 240 V

• Total connected load: cooktop: 11.1 kW, oven: 2.94 kW

Gas cooktop

- 5 SABAF burners with power:Central: 3.6 kWFront left: 3.0 kW

- Rear left: 1.75 kW
- Front right: 1.0 kW
- Rear right: 1.75 kW

Preset to natural gas (20 mbar)

- Can be converted to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

- Built-in electric oven with 8 heating types:
- Bottom heat
- Conventional
- Convectional with fan
- Grill
- Double grillDouble grill with fan
- Defrost

- Enviroment, comfort

 Mechanical control with digital timer
- Full glass inner door
- Enamelled cooking chamber
- Cooking chamber volume: 1091
- Smooth oven walls with suspended grates
- Removable oven door for easy cleaning
- Oven lighting

• Appliance dimensions: $76.9 \times 89.5 \times 60.0$ cm





Blaupunkt compact appliances – a wide variety of functions in the smallest of spaces

Cooking, braising, steaming – not only in large kitchens, but also in the smallest of spaces, Blaupunkt compact appliances offer the full range of functions while still leaving you plenty of space for cutting, seasoning and preparing.

Our space-saving multitasking appliances are real allrounders and a smart addition for unused niches in larger kitchens.



Smart slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart Slider.



Touch Control

Precise, innovative and very user-friendly: gently touching the Touch Control buttons is enough to select the desired setting.



Automatic programmes

One touch away from the perfect result: our automatic programmes are equipped for nearly every ingredient. Cooking can't get any easier.



Combined operation

True all-rounders – our combination appliances! The little multitasking genius combines an oven function, a microwave and can even steam.



Steam cooking

Cooking with hot steam is gentle to the food, promises maximum taste and a healthy approach to your cooking.

| <u>~~</u> | |
|-----------|--|
| Hot air | |

Hot air

Optimum heat distribution allows you to achieve perfect baking and roasting results on up to three levels simultaneously. For energy-optimised baking and roasting on just one level, you can select the Hot Air Eco function.



Fire

Compact appliances

Combination steam cooker





- Voltage: 220 240 V
- Total connected load: 3.0 kW
- Grill output: 2,200 W / hot air output: 1,700 W

Compact oven with 13 heating types:

- Top/bottom heat
- Bottom heat
- Hot Air Eco
- Hot air
- Circulation
- Circulation grill
- Vario large area grill
- Vario small area grill
- Pizza level
- Defrost function
- Dough process
- Steam cooking from 35 °C 100 °C
- Combined operation

- Control panel in the Dark Steel design
- Touch Control
- Smart Slider
- Digital display in white
- Push & pull water tank
- Temperature sensor
- Quick heating
- Temperature recommendation
- 16 automatic programmes
- Electronic temperature regulation from 30 °C 250 °C
- Full glass inner door
- Dark Steel metal handle with logo
- Cooking chamber volume 501
- Flat oven walls with oven racks
- Enamelled cooking chamber
- Removable oven door for easy cleaning
- LED oven lighting
- Safety switch-off
- Child protection
- Cooling fan

- Appliance dimensions: 45.4 × 59.5 × 56.8 cm
- Installation dimensions: $45.0 \times 56.0 \times 55.0$ cm
- Panel height: 96 mm

Combination steam cooker

Α (160°C)

- Voltage: 220 230 V
- Total connected load: 3.3 kW
- 900 W Microwave
- Grill output: 1,200 W / hot air output: 1,750 W
- Steam cooker output: 1,500 W

- Heating types: hot air, circulation grill, area grill, microwave, combined operation, steam function • 5 output levels: 900 W, 700 W, 450 W, 300 W, 100 W
- Maximum temperature circulation / hot air: 230 °C
- Maximum temperature circulation grill: 180 °C
- Maximum temperature steam cooker: 100 °C
- Maximum temperature steam cooker/hot air: 230 °C

- Control panel made of glass and stainless steel
- 341 stainless steel cooking chamber
- 1 I water tank volume for steam cooking function
- Metal handle
- Folding door
- Digital display
- Digital clock with day display
- All heating types can be used separately and in combination
- User-friendly electronics with touch control
- 10 defrost / cooking programmes with automatic weight adjustment
- Cook control 80 automatic programmes
- Child protection

- Appliance dimensions: 45.4 × 59.5 × 52.5 cm
- Installation dimensions: 45.0 × 56.0 × 55.0 cm
- Panel height: 96 mm





Fire

Built-in compact microwave oven



- Voltage: 230 240 V
- Connected load: 2.3 kW
- 1,000 W Microwave
- Grill Power: 1,100 WHot air Power: 2,300 W

- Built-in appliance for a 60 cm wide tall cupboard
- Heating types: microwave, grill, hot air, combination cooking
- Touch control
- 5 output levels: 1,000 W, 800 W, 500 W, 300 W, 100 W
- 10 automatic programmes
- Defrost by weight/time Red LED Digital display
- 341 stainless steel cavity
- 31.5 cm glass turntable
- Child safety lock
- Push open door

- Appliance dimensions: $38.8 \times 59.5 \times 47.0$ cm
- Installation dimensions: $38.0 \times 56.0 \times 55.0$ cm



Output, consumption • Voltage: 230 – 240 V

- Connected load: 2.3 kW
- 1,000 W Microwave
- Grill Power: 1,100 W
- Hot air Power: 2,300 W

• Built-in microwave, stainless steel

Built-in compact microwave oven

- Heating types:microwave, grill, hot air, combination cooking
- Knob and button control
- 5 output levels: 1,000 W, 800 W, 500 W, 300 W, 100 W
- 10 automatic programmes
- Defrost by weight / time
- White LED digital display
- 341 stainless steel cavity
- 31.5 cm glass turntable
- Child safety lock

- Appliance dimensions: 38.8 × 59.5 × 47.0 cm
- Installation dimensions: $38.0 \times 56.0 \times 55.0$ cm







Fire

Warming drawer





- Voltage: 220 240 V
- Total connected load: 0.4 kW

Heating by fan heater

- Temperature regulation in 3 levels: from 30 °C 80 °C
- 20.51 interior volume
- Rotary switch on inside

Black glass front

- Opens without handles by push & pull
- Telescopic full extension
- Anti-slip mat
- Dish pre-heating
- Food warm-keeping function
- Defrosting of frozen food
- Load capacity 15 kg

- Appliance dimensions: $14.0 \times 59.4 \times 54.2$ cm
- Installation dimensions: $14.0 \times 56.0 56.8 \times 55.0$ cm

Warming drawer





Output, consumption • Voltage: 220 – 240 V

- Total connected load: 0.4 kW

- Heating by fan heater • Temperature regulation in 3 levels: from 30 °C – 80 °C
- 20.5 l interior volume
- Rotary switch on inside

- Black glass front with stainless steel screen
- Opens without handles by push & pull
- Telescopic full extension
- Anti-slip mat
- Dish pre-heating
- Food warm-keeping function
- Defrosting of frozen food
- Load capacity 15 kg

- Appliance dimensions: $14.0 \times 59.4 \times 54.2$ cm
- Installation dimensions: $14.0 \times 56.0 56.8 \times 55.0$ cm





Blaupunkt hobs – heat that makes a point

Not all heat is alike. Sometimes the temperature has to rise rapidly – boosting heat for perfect searing. Other things need time – uniform heat for gentle cooking.



Smart slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart Slider.



Touch Control

Precise, innovative and very user-friendly: gently touching the Touch Control buttons is enough to select the desired setting.



Induction

Immediately hot, immediately cold, and nothing gets burnt. The base of the pan is directly heated by the induction coil. The heat is only produced where it is needed. This means short heat-up times, more safety and much less energy consumption.



Combi induction

Two induction cooking zones can be combined together to create one single cooking zone, thereby allowing the use of very large pots and pans. Of course, the two large cooking zones can also be used separately.



Boost function

No long heat-up times: the right cooking temperature is reached in seconds with the boost function.



Multi Control

The extractor fan hood and hob are intelligently linked. The extractor fan hood can be controlled separately using the hob control panel and automatically adjusts the fan power to the heat generated. The colour temperature and light intensity are individually controlled via the intelligent light system.






Hobs

Stand-alone hob, combi induction



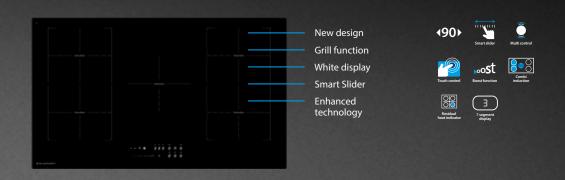

- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 5 induction cooking zones with booster: • 2 cooking zones, combi induction
- Ø 20.0 \times 21.0 cm, 2.3 kW (3.0 kW) • 2 cooking zones, combi induction
- $\emptyset 20.0 \times 21.0$ cm, 2.3 kW (3.0 kW) • 1 cooking zone Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Flexible linking Any two cooking zones can be combined into one cooking zone
- Boost function for all induction cooking zones
- Grill function
- Electronic control in 10 power levels
- Digital display of cooking levels in white
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 88.0 \times 52.0$ cm
- Installation dimensions: $5.2 \times 81.0 \times 49.0$ cm



It's every barbecue fan's dream: It may be raining, snowing or stormy outside – he can still indulge his passion inside. With the cast iron grill plate or the new cast iron Teppanyaki plate, steaks, fish and vegetables get that familiar aroma from the open-air barbecue season.



PLENTY OF SPACE Large area for preparing large quantities



LOW FAT – GREAT TASTE

Healthy preparation – the optimised surface allows excess oil to drain off and requires little cooking fat



FLEXIBILITY IN ALL AREAS Diverse possibilities – vegetables, meat, fish and much more



UNIFORMITY RIGHT DOWN THE LINE Constant heat even with large quantities of food



HEAT TO PERFECTION The temperature can be set and maintained exactly, thus preventing burning and rapid drying



EASY TO CLEAN

The smooth surface allows easy and quick cleaning after use

Cast iron grill plate

5Z 99GP01




27

Hobs

Stand-alone hob, induction





- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 2 cooking zones Ø 17.5 cm, 1.4 kW (2.1 kW)
- 2 cooking zones Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 78.0 \times 52.0$ cm
- Installation dimensions: $5.2 \times 75.0 \times 49.0$ cm

Stand-alone hob, induction





Smart Slider Quick assembly Enhanced technology




- Voltage: 220 240 V
- Total connected load: 7.4 kW
- 4 induction cooking zones with booster:
- 1 cooking zone Ø 15.5 cm, 1.4 kW (2.1 kW)
- 1 cooking zone Ø 15.5 cm, 1.4 kW (1.85 kW)
- 2 cooking zones Ø 21.5 cm, 2.3 kW (3.0 kW)

- Frameless
- Multi Control
- Smart Slider
- Touch Control
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Pot detection
- Child protection
- Timer simultaneously adjustable for each cooking zone
- Countdown function
- Quick start function
- Recall function Repeat the last settings
- Automatic safety switch-off
- Overflow detection
- Power management
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.2 \times 59.0 \times 52.0$ cm
- Installation dimensions: $5.2 \times 56.0 \times 49.0$ cm





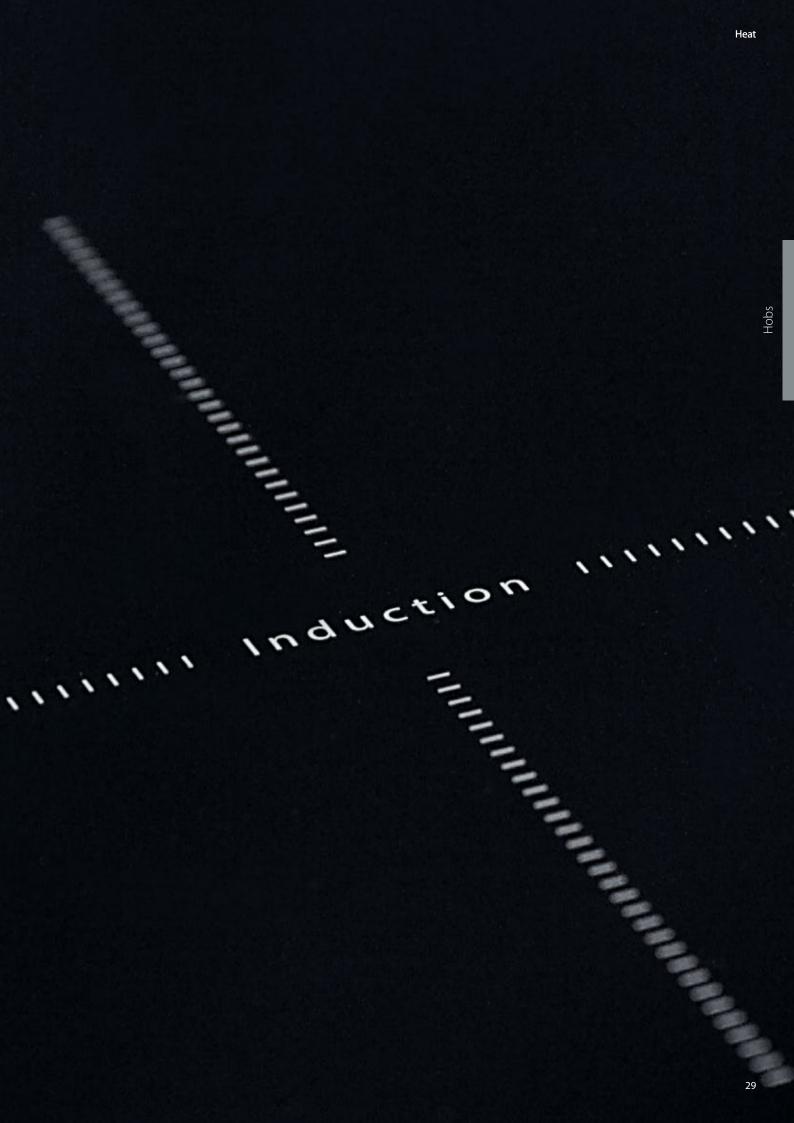

Hobs

Stand-alone hob





- Voltage: 220 240 V
- Total connected load: 7.0 kW
- 4 high-speed cooking zones: • 1 cooking zone Ø 14.5/22.0 cm, 1.0 kW (2.2 kW)
- double ring zone
- 1 cooking zone Ø 18.0/27.5 cm, 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

- Frameless
- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Timer simultaneously adjustable for each cooking zone
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 78.0 \times 52.0$ cm
- Installation dimensions: $5.7 \times 75.0 \times 49.0$ cm

Stand-alone hob 5RG 64361 New Tothe into a none Casemic Total Residual 7 segment **(60)**

Output, consumptio • Voltage: 220 – 240 V

- Total connected load: 7.0 kW
- 4 high-speed cooking zones:
- 1 cooking zone Ø 14.5/22.0 cm, 1.0 kW (2.2 kW) double ring zone
- 1 cooking zone Ø 18.0/27.5 cm, 1.5 kW (2.4 kW) casserole zone
- 2 cooking zones Ø 15.5 cm, 1.2 kW

- Frameless
- Touch Control
- Sensor button for zone extension
- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Timer simultaneously adjustable for each cooking zone • Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system
- Appliance dimensions: $5.7 \times 59.0 \times 52.0$ cm
- Installation dimensions: $5.7 \times 56.0 \times 49.0$ cm





Stand-alone hob

5RE 64361 New



- Voltage: 220 240 V
- Total connected load: 6.0 kW
- 4 high-speed cooking zones:
- 2 cooking zones Ø 19.0 cm, 1.8 kW

- Electronic control in 10 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Automatic safety switch-offOverflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 59.0 \times 52.0$ cm
- Installation dimensions: $5.7 \times 56.0 \times 49.0$ cm

Stand-alone hob





- Output, consumption
 Voltage: 220 240 V
- Total connected load: 3.0 kW
- 2 high-speed cooking zones:
- 1 cooking zone Ø 14.5 cm, 1.2 kW
- 1 cooking zone Ø 18.0 cm, 1.8 kW

- Frameless
- Touch Control
- Electronic control in 9 power levels
- Digital display of cooking levels
- Residual heat display for each cooking zone
- Child lock
- Automatic safety switch-off
- Overflow detection
- Flush-mounted installation possible
- Quick assembly system

- Appliance dimensions: $5.7 \times 29.0 \times 52.0$ cm
- Installation dimensions: $5.7 \times 27.0 \times 49.0$ cm






Heat

Blaupunkt gas hobs – heat in its most original form

Change the temperature at lightning speed – cooking on an open flame is direct, emotional and, thanks to the latest technology, completely safe. A Blaupunkt gas hob is an eye-catcher in the kitchen and delivers a truly professional cooking experience.

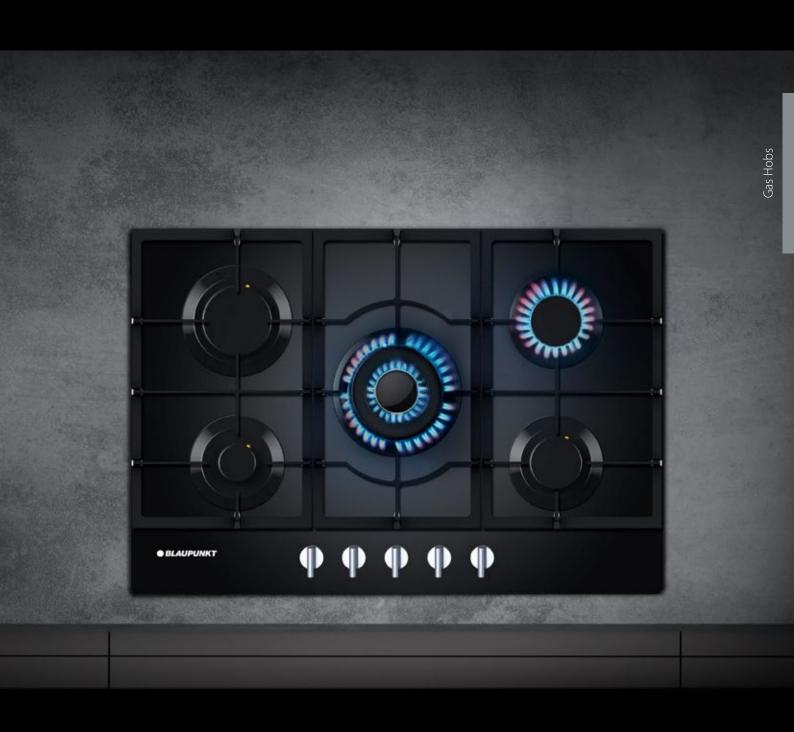

Gas hobs

Gas hob



160



Output, consumptio

• Connected load, gas: 8.1 kW

- Burner with 4 cooking areas:
- Front left: Triple burner 3.6 kW
- Back left: Standard burner 1.75 kW
- Rear right: Standard burner 1.75 kW
- Front right: Economy burner 1 kW

Design, comfort

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
 Protection against unintentional escape of gas (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas
- (LPG nozzle is included in the package)
- Connection cable 1 m

Dimensions H × W × D

- Appliance dimensions: $9.0 \times 60.0 \times 51.5$ cm
- Installation dimensions: $4.5 \times 56.0 \times 49.0$ cm

Gashob $5 - R = 7 - 7 - 0 - \Lambda$





475▶

Output, consumptior

- Connected load, gas: 11.1 kW
- Burner with 5 cooking areas:
- Front left: Economy burner 1 kW
- Back left: Rapid burner 3 kW
- Mid: wok burner:3.6 kW
- Rear right: Standard burner 1.75 kW
- Front right: Standard burner 1.75 kW

Design, comfort

- Black glass, hardened
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas
- (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

Dimensions H × W × D

- Appliance dimensions: $9.0 \times 75.0 \times 52.0$ cm
- Installation dimensions: $4.5 \times 56.0 \times 49.0$ cm





Gas hob

5GB 61151AU New

460►




• Connected load, gas: 8.1 kW

- Burner with 4 cooking areas:
 Front left: Triple burner 3.6 kW
 Back left: Standard burner 1.75 kW
- Rear right: Standard burner 1.75 kW
- Front right: Economy burner 1 kW

- Stainless steel
- Electrical spoke spark ignition controllable with one hand
 Protection against unintentional escape of gas
- (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Convertible to liquid gas (LPG nozzle is included in the package)
- Connection cable 1 m

- Appliance dimensions: 9.0 × 59.0 × 51.0 cm
- Installation dimensions: $4.5 \times 56.0 \times 49.0$ cm

Gas hob



- Connected load, gas: 11.1 kW
- Burner with 5 cooking areas:
- Front left: Economy burner 1 kW
- Back left: Rapid burner 3 kW
- Mid: wok burner: 3.6 kW
- Rear right: Standard burner 1.75 kW
- Front right: Standard burner 1.75 kW

- Stainless steel
- Front control knob
- Electrical spoke spark ignition controllable with one hand
- Protection against unintentional escape of gas
- (thermoelectric safety pilot)
- Cast iron pot carrier
- Preset to natural gas (20 mbar)
- Can be converted to liquid gas
- (LPG nozzle is included in the package)
- Connection cable 1 m

- **Dimensions H × W × D** Appliance dimensions: 9.0 × 86,0 × 51.0 cm
- Installation dimensions: $4.5 \times 81.5 \times 49.0$ cm







Blaupunkt hob with integrated extractor – remove the fumes right where they arise

The modern extractor solution offers one thing above all – more freedom: A clear view, as the fumes are extracted directly where they arise. Odourless cooking and more freedom in kitchen planning.

High-quality filter systems allow nothing but fresh air to be produced, while still being powerful and noise-free. The perfect combination of heat and air in a single appliance.



Smart Slider

An intuitive, simple control concept for all appliances – every setting can be perfectly selected with the Smart Slider.



Touch Control

Precise, innovative and very user-friendly: gently touching the Touch Control buttons is enough to select the desired setting.



Induction

Induction

Immediately hot, immediately cold, and nothing gets burnt. The base of the pan is directly heated by the induction coil. The heat is only produced where it is needed. This means short heat-up times, more safety and much less energy consumption.



Combi induction

Two induction cooking zones can be combined together to create one single cooking zone, thereby allowing the use of very large pots and pans. Of course, the two large cooking zones can also be used separately.

Hob with extractor fan

Perfectly planned – Hob with an extractor fan

Perfect integration in the kitchen cabinet makes integrated design and maximum functionality possible in the first place. Thanks to the slim and space-efficient design, the appliances allow a greater use of your cabinet and drawer spaces.



SHORTER DISTANCE – MORE EFFI-CIENT EXTRACTION – FRESHER AIR

The downdraft extractor ensures that cooking fumes do not even escape to the room and are instead filtered directly.

| \bigcap | |
|-----------|---|
| | J |

BETTER POSITIONING – ENJOYABLE COOKING

The intelligent fusion of a hob and extractor fan saves you from an unfavourable eye-level appliance position. Thanks to the direct downdraft extraction of the fumes, you keep a clear view.



FEWER APPLIANCES – PLANNING WITHOUT LIMITS

The absence of the additional appliance at head height opens up new possibilities in kitchen planning. Positioning the hob in the centre of the room or directly in front of the window allows you a clear view: no more limits stand in your way.



EASIER TO ACCESS – EASIER TO CLEAN

The filter technology ensures excellent absorption of moisture. To clean, you can access the filters easily and practically from above, rendering a tedious disassembly unnecessary.



EFFICIENT TECHNOLOGY – MAXIMIZED PERFORMANCE

Optimized extraction paths, powerful motors and a perfectly balanced flow rate ensure maximum performance.



RELAXING COOKING EXPERIENCE

Installation at base height shifts the sound field from the eye level downwards. Especially quiet motors give you additional peace and quiet.

| \bigcap | A/ |
|-----------|----|
| | J |

QUALITY FROM SELECTION TO WORKMANSHIP


Functionality and longevity are the result of the use of high-quality materials and precise workmanship.



Here you can find all information about our hob fans.

Hobs with extractor fan

Stand-alone hob, induction with integrated extractor fan





- Voltage: 220 240 V
- Total connected load: 8.8 kW
- 4 induction cooking zones with booster:
- 4 cooking zones $\tilde{\emptyset}$ 22 cm, 2.1 kW (3.7 kW)

- Frameless
- Touch control with Smart Slider
- Boost function for all induction cooking zones
- Electronic control in 10 power levels
- Main switch for hob and extractor fan
- Toggle function with fixed temperatures (40°C, 70°C und 98°C)
- Cooking Chef Mode, Pause and Recall
- Residual heat display
- Pot detection Child lock
- Timer
- Countdown function
- $2 \times$ bridging function
- Flush-mounted installation possible

- Appliance dimensions: $82.7 98.2 \times 90 \times 53$ cm
- Installation dimensions: $5.8 \times 86.2 \times 49.5$ cm

- Air outlet / exhaust air duct to the left
- It is not possible to plan in dishwashers, underframe coolers, base drawers, etc. in the exhaust air routing area
- For the circulation variant, it is not possible to plan in dishwashers, underframe coolers, base drawers, etc. directly on the left side
- Min. cabinet width 900 mm
- Worktop depth min. 600 mm (correspondingly deeper for the planning of recess panelling)
- Base height min. 100 mm



- Voltage: 220 240 V
- Total connected load: 165 W
- Average power consumption: 30.8 kWh/year
- Noise min./max. normal level/intensive level:
- min 45 dB (A) max. 65 dB (A) max. 70 dB (A) • Fan output max. normal level / intensive level*: In extraction mode 580 m³/h/730 m³/h In circulation mode $45 \text{ m}^3/\text{h}/560 \text{ m}^3/\text{h}$

- Electronic opening of the extractor fan
- Glass ceramic, black
- Suitable for installation in a kitchenette or kitchen island
- Optional extraction or circulation mode
- (for circulation mode a carbon filter is required) • 6-level fan output controllable via Touch Control with
- 7-segment LED display
- 5 power levels + 1 intensive level
- · Intensive level with automatic reset for extraction mode
- Automatic three-level blower overrun of 5 / 10 and 20 minutes with LED display
- Metallic grease filter and carbon filter saturation indicator via LED warning light
- For the cleaning / emptying of metallic filters and water collection vessels, the appliance automatically blocks after 40 hours of operation
- Automatic overrun for circulation mode
- Water collection tank: 0.75 litre capacity
- Powerful and quiet blower
- Metallic grease filter, dishwasher-safe



Multi Control

Blaupunkt Multi control – Multi Control –

a unique connection

Here everything comes together that belongs together: Blaupunkt hobs with Multi Control i form a unique combination – together with the Multi Control extractor fan hoods. These can be easily controlled using the hob operating panel, and they automatically adjust their output in line with the heat generation of the hob. The cable-free Multi Control sensor promises a long-lasting technical standard and intuitive operation.



Extractor fan hoods

Ceiling fan

5DD 72555AU New

New design Low installation depth Improved energy efficiency

Air



- Voltage: 220 240 V
- Total connected load: 150.4 W
- Average power consumption: 38.3 kWh/year*
- Fan efficiency class: A*
- Light efficiency class: B*
- Grease filter efficiency class: E*
- Noise min./max. Normal level: 40/65 dB*
- Fan output max. Normal level / Intensive level*:
- In extraction mode 490 m³/h/700 m³/h
- In circulation mode $300 \text{ m}^3/\text{h}/400 \text{ m}^3/\text{h}$

- Stainless steel
- For ceiling installation above kitchen islands
- Multi Control
- Optional extraction or circulation mode
- (carbon filter required for circulation mode)
- Electronic control
- 4-level fan power (3 power levels + 1 intensive level) controllable through Multi Control
- Intensive levels with automatic reset
- Filter saturation display
- Powerful and guiet blower
- Uniform, bright lighting with 2×2.7 W LED modules
- Optional extendible Multi Control function: LED light with adjustable brightness and colour temperature
- Illuminance: 111 Lux
- Colour temperature: 4,000 K preset
- Metal grease filter, dishwasher-safe

• Appliance dimensions: max. $19.2 \times 90.0 \times 49.9$ cm



Voltage: 220 – 240 V

Wall hood

- Total connected load: 225.4W
- Average power consumption: 44 kWh/year*
- Noise min./max. normal level: 48/58 dB³
- Fan output max. normal level / intensive level*:
- In extraction mode 560 m³/h/632 m³/h
- In circulation mode 394 m³/h/445 m³/h

- Stainless steel
- For wall installation above cooking zones
- Multi Control
- Optional extraction or circulation mode (for circulation mode a carbon filter is required)
- Electronic control
- 4-level fan output (3 power levels + 1 intensive level) controllable via Multi Control
- Intensive levels with automatic reset
- Powerful and guiet blower
- Uniform, bright lighting with 2×2.7 W LED modules
- Optional extendible Multi Control function: LED light
- with adjustable brightness and colour temperature • Heat sensor for automatic mode
- Colour temperature 4,000 K preset
- Metallic grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: $64.0 - 106.0 \times 90.0 \times 48.0 \, \text{cm}$
- Appliance dimensions, circulation: $71.0 - 113.0 \times 90.0 \times 48.0$ cm





Wall hood





- Voltage: 220 240 V
- Total connected load: 135 W
- Average power consumption: 72.5 kWh/year*
- Fan efficiency class: E*
- Light efficiency class: A*
 Grease filter efficiency class: C*
- Noise min./max. Normal level: 53/64 dB*
- Fan output max. Normal level:
- In extraction mode max. 380 m³/h
- In circulation mode max. 235 m³/h

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 3-level fan power controllable via push buttons
- Uniform, bright lighting with 2×5 W LED lamps
- Illuminance: 900 Lux
- Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft

- Appliance dimensions, extraction: $66.0 - 101.5, \times 90.0 \times 47.0 \, \text{cm}$
- Appliance dimensions, circulation: 79.0 - 101.5, $\times 90.0 \times 47.0$ cm

Wall hood





Output, consumption Voltage: 220 – 240 V

- Total connected load: 135 W
- Average power consumption: 72.5 kWh/year*
- Fan efficiency class: E*
- Light efficiency class: A*
- Grease filter efficiency class: C*
- Noise min./max. Normal level: 53/64 dB*
- Fan output max. Normal level:
- In extraction mode max. 380 m³/h
- In circulation mode max. 235 m³/h

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 3-level fan power controllable via push buttons
- Uniform, bright lighting with 2×5 W LED lamps
- Illuminance: 900 Lux
- Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe
- Incl. exhaust air shaft
- Appliance dimensions, extraction:
- $66.0 101.5 \times 60.0 \times 47.0 \, \text{cm}$
- Appliance dimensions, circulation: $79.0 - 101.5 \times 60.0 \times 47.0 \, \text{cm}$





Extractor fan hoods

Flat hood

Air





- Voltage: 220 240 V
- Total connected load: 118W
- Average power consumption: 38.6 kWh/year*
- Noise min./max. normal level: 54/67 dB*
- Fan power*
- In extraction mode max. 340 m³/h
- In circulation mode max. 120 m³/h

- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- For wall cabinet 60 cm
- Telescopic extension without panel
- Panel from original light strip from kitchen furniture manufacturer
- 3-level fan output controllable via slide switch
- Automatic switch-on and switch-off by pressing the moving filter surface
- Uniform, bright lighting with 2 × 4 W LED lamps
- Illuminance: 100 Lux
- Colour temperature 3,000 K
- Metallic grease filter, dishwasher-safe

• Appliance dimensions: $19.6 \times 59.8 \times 26.0$ cm



Flat hood

- Output, consumption Voltage: 220 240 V
- Total connected load: 118 W
- Average power consumption: 38.6 kWh / year*
- Noise min./max. normal level: 54/67 dB*
- Fan power*
- In extraction mode max. 340 m³/h
- In circulation mode max. 120 m³/h

- Optional extraction or circulation mode (activated carbon filter required for circulation mode)
- For wall cabinet 90 cm
- Telescopic extension without panel
- Panel from original light strip from kitchen furniture manufacturer
- 3-level fan output controllable via slide switch
- Automatic switch-on and switch-off by pressing the moving filter surface
- Uniform, bright lighting with 2 × 4 W LED lamps
- Illuminance: 100Lux
- Colour temperature 3,000 K
- Metallic grease filter, dishwasher-safe

• Appliance dimensions: $19.8 \times 89.8 \times 28.0$ cm







- Voltage: 220 240 V
- Total connected load: 254 W
- Average power consumption: 96.1 kWh / year*
- Fan efficiency class: A*
- Light efficiency class: A*
 Grease filter efficiency class: C*
- Noise min./max. Normal level: 57/71 dB*
- Fan output max. Normal level / Intensive level*:
- In circulation mode 290 m³/h/340 m³/h

- Fan module with white glass
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- Soft push buttons (3 power levels + 1 intensive level) • Intensive levels with automatic reset
- High, fine-tunable fan power through electronic control
- Edge suction
- Uniform, bright lighting with 2 × 1 W LED lamps
- Illuminance: 200 Lux
- Colour temperature: 3,000 K
- Metal grease filter, dishwasher-safe

• 5Z 9100X1: Activated carbon filter

- **Dimensions H × W × D** Appliance dimensions, extraction: $33.0 \times 52.0 \times 30.0$ cm
- Appliance dimensions, circulation: $33.0 \times 52.0 \times 30.0$ cm

Fan module







Output, consumption • Voltage: 220–240V

- Total connected load: 254 W
- Average power consumption: 96.1 kWh/year*
- Noise min./max. normal level: 57/71 dB*
- Fan output max. normal level / intensive level*: In extraction mode $600 \text{ m}^3/\text{h}/680 \text{ m}^3/\text{h}$

- Fan module with white glass
- Optional extraction or circulation mode (starter set required for circulation mode)
- Soft push buttons (3 power levels + 1 intensive level)
- Intensive levels with automatic reset
- High, fine-tunable fan output via electronic control
- Edge suction
- Uniform, bright lighting with 2×1 W LED lamps
- Illuminance: 200 Lux
- Colour temperature 3,000 K
- Metallic grease filter, dishwasher-safe

- Appliance dimensions, extraction: $33.0 \times 86.0 \times 30.0$ cm
- Appliance dimensions, circulation: $33.0 \times 86.0 \times 30.0$ cm





Extractor fan hoods

Fan module

Air





Output, consumption • Voltage: 220 – 240 V

- Total connected load: 118W
- Average power consumption: 44.7 kWh/year*
- Noise min./max. normal level: 54/70 dB (A)*
- Fan output max. normal level / intensive level*:
- In extraction mode max. 390 m³/h
- In circulation mode max. 120 m³/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 60 cm
- Fan power 3-level adjustable by speed sliding switch
- Powerful and guiet blower
- + Even, bright illumination with $2 \times 4 W$ LED lamps
- Illuminance: 100 Lux
- Color temperature: 3,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: $21.4 \times 52.2 \times 28.6$ cm

Fan module







- Output, consumptio Voltage: 220 240 V
- Total connected load: 118 W
- Average power consumption: 44.7 kWh/year*
- Noise min./max. normal level: 54/70 dB*
- Fan output max. normal level / intensive level*:
- In extraction mode max. 390 m³/h
- In circulation mode max. 120 m³/h

- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 90 cm
- Fan power 3-level adjustable by speed sliding switch
- Powerful and quiet blower
- Even, bright illumination with 2×4W LED lamps
- Illuminance: 100 Lux
- Colour temperature: 3,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: $21.4 \times 70.2 \times 28.6$ cm









- Voltage: 220 240 V
- Total connected load: 118 W
- Average power consumption: 44.7 kWh / year*
- Noise min. / max. normal level: 54 / 70 dB (A)*
- Fan output max. normal level / intensive level*:
- In extraction mode max. 390 m³/h
- In circulation mode max. 12 m³/h

- Optional extraction or circulation mode
- (starter set required for circulation mode)
- For wall cabinet 60 cm
- Fan power 3-level adjustable by speed sliding switch
- Powerful and quiet blower
 Even, bright illumination with 2 × 4W LED lamps
- Illuminance: 100 Lux
- Color temperature: 3,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

- Appliance dimensions: $21.4 \times 52.2 \times 28.6$ cm

Fan module





(70)

Output, consumption • Voltage: 220 – 240 V

- Total connected load: 118 W
- Average power consumption: 44.7 kWh/year*
- Noise min./max. normal level: 54/70 dB*
- Fan output max. normal level / intensive level*:
- In extraction mode max. 390 m³/h
- In circulation mode max. 120 m³/h


- Optional extraction or circulation mode (starter set required for circulation mode)
- For wall cabinet 90 cm
- Fan power 3-level adjustable by speed sliding switch
- Powerful and quiet blower
- Even, bright illumination with 2×4W LED lamps
- Illuminance: 100 Lux
- Colour temperature: 3,000 K
- Metallic grease filter, dishwasher-safe (aluminium)

• Appliance dimensions: $21.4 \times 70.2 \times 28.6$ cm





Water

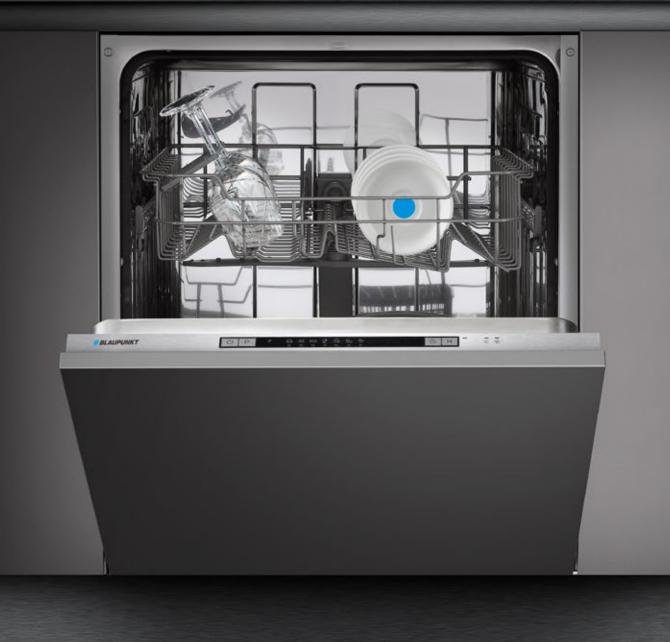

Blaupunkt dishwashers – the washing-up is part of the fun

First the pleasure, then the work? Blaupunkt dishwashers do the work on your behalf to ensure that the pleasure continues past the meal. Various installation heights and widths And variable storage space – the Blaupunkt programme offers the perfect aide for every space requirement.



Aquastop

A lifelong guarantee against water damage. The Aquastop safety system prevents all types of water damage – whether to the supply hose or through a leak in the appliance.



Extra quiet

More durable, efficient and particularly quieter motor.



Vario basket

The upper basket is height-adjustable and may be equipped with up to two racks depending on the model. The lower basket has two folding spine rows.



Digital display

Digital display

A digital display gives you a good overview of the selected programme and the cycle time.

Dishwashers

Built-in dishwasher, semi integrated

5VI 310AL



Output, consumptio

- Energy efficiency class: 3 star
- Water consumption class: 4.5 star
- Capacity: 12 standard place settings
- Energy / water¹⁾: 199 kWh / 2,940 l
- Energy/water²⁾: 0.71 kWh/10.51
- Noise: 49 dB (A) re 1 pW
- Connected load: 220 240 V

Features, comfort

- 6 programs: Intensive, Heavy, Eco, Glass, 90 min., Rapid
- Type of control: Electronic Control
- Type of display: light
- Power of heat element (230 V): 1,800 W
- Timer pre-setting 3h/6h/9h
- Push button functions: On / Off Button, Program Button, Delay Button, Half load, start / pause
- Functions of Indicator: Rinse Aid, end of the program, Delay time, Half load functions, program, on / off
- Type of heating element: Hidden
- Filter type: Main filter / Coarse filter / Fine filter
- Filter material: Plastic + stainless steel
- Tub material: Stainless steel
- Aquastop
- Cutlery basket in lower basket

Dimensions H × W × D

- Appliance dimensions: $81.5 \times 59.8 \times 57.0$ cm
- Recess dimensions: $81.5 \times 59.8 \times 57.0$ cm

Built-in dishwasher, fully integrated





Output, consumption

- Energy efficiency class: 3 star
- Water consumption class: 4.5 star
- Capacity: 12 standard place settings
- Energy/water¹⁾: 199 kWh/2,9401
- Energy/water²⁾: 0.71 kWh/10.51
- Noise: 49 dB (A) re 1 pW
- Voltage: 220 240 V

Features, comfort

- 7 programs: Intensive, Eco, Heavy, Glass, 90 min., Rapid, Soak
- Type of control: Electronic Control
- Type of display: LED
- Power of heat element (230 V): 1,800 W
- Timer pre-setting 00 24 h
- Push button functions:
- On / Off Button, Program Button, Delay Button, Half load
- Functions of Indicator: Rinse Aid, end of the program,
- Delay time, Half load functions, program
- Type of heating element: Hidden
- Filter type: Main filter / Coarse filter / Fine filter
- Filter material: Plastic + stainless steel
- Tub material: Stainless steel
- Aquastop
- Cutlery basket in lower basket

Dimensions H × W × D

- Appliance dimensions: $81.5 \times 59.8 \times 55.0$ cm
- Built-in dimensions: $81.5 \times 59.8 \times 55.0$ cm



'Consumption per dishwashing cycle with cold water filling (for energy consumption: including consumption by operating modes with low power consumption). Actual consumption with energy/water consumption depending on the type of use of the machine.





Free-standing dishwasher







- Energy efficiency class: 3.5 star
- Energy eniclency class: 3.5 star
 Water consumption class: 4.5 star
 Capacity: 14 standard place settings
 Energy/water¹: 205 kWh/3,5561
 Energy/water²: 0.73 kWh/12.71
 Noise: 47 dB (A)
 Connected load: 220-240 V

- 6 programs: Intensive, Heavy, Eco, Glass, 1 hour, Rapid
- Type of display: LED
 Power of heat element (230 V): 1,800 W
 Timer pre-setting 24 h
- Push button functions: On / Off Button, Program Button, Delay Button, Half load, start/pause
- Functions of Indicator: Rinse Aid, end of the program, Delay time, Half load functions, program, on / off
 Type of heating element: Hidden
- Filter type: Main filter / Coarse filter / Fine filter
- Filter material: Plastic + stainless steel
- Tub material: Stainless steel Aquastop
- Cutlery drawer

Dimensions H × W × D • Appliance dimensions: 84.5 × 60.0 × 59.8 cm





BLAUPUNKT ADDITIONAL ACCESSORIES

Adapt your use and increase the functionality of your appliance with our selection of additional accessories.

Visit us and find out more ...






Special accessories for ovens

| Multi-use wire shelf 5Z 10CR10X0 | Compatible with 5B10N 0240AU 5B20N 0290AU | |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------|--|
| Universal pan 5Z 36BA50 | Compatible with 5B36N 0250AU 5B10N 0240AU 5B36P 0250AU 5B20N 0290AU | |
| Multi-use wire shelf 5Z 36CR10X0 | Compatible with 5B36N 0250AU 5B36P 0250AU | |
| Enamelled baking tray | Compatible with 5B50P 8590GB 5C90S 8990GB 5B50N 8590GB | |
| Multi-use wire shelf 5Z 50CR10X0 | Compatible with 5B50P 8590GB 5C90S 8990GB 5B50N 8590GB | |
| <mark>Universal pan</mark> 5Z 94CB10E0 | Compatible with 5BC 93190AU 5BC 94190AU | |
| Multi-use wire shelf 5Z 94CR10X0 | Compatible with 5BC 93190AU 5BC 94190AU | |
| <mark>Universal pan</mark> 5Z 91CB10E0 | Compatible with 5RC 91490AU | |
| Multi-use wire shelf 5Z 91CR10X0 | Compatible with 5RC 91490AU | |

| Telescopic extension rail | Compatible with 5B50P 8590GB 5B50N 8590GB | |
|-------------------------------------------------|--------------------------------------------------------|--|
| Telescopic extension rail | Compatible with 5B36N 0250AU 5B36P 0250AU | |
| Steamer insert (stainless steel) 5Z 94LB50 | Compatible with 5KD 94150GB | |
| Steamer insert (stainless steel) 5Z 50CS10E0 | Compatible with 5C90S 8990GB | |
| Temperature probe 5Z 50TE10E1 | Compatible with 5C90S 8990GB | |

Special accessories for hobs

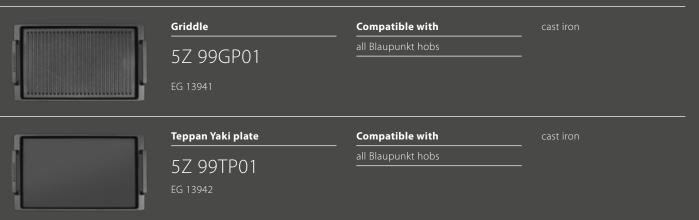

Accessories for hobs with integrated extraction

| Wall box with stainless steel external vent FK 130 plastic | Compatible with 51X 99290AU | plastic - |
|------------------------------------------------------------------|--------------------------------|--------------|
| Base ventilation grille FK 150 plastic | Compatible with 5IX 99290AU | plastic - |
| Connector 15° curve – horizontal – FK 113 plastic | Compatible with 5IX 99290AU | plastic - |
| Coupling FK 110 plastic | Compatible with 5IX 99290AU | plastic - |
| Connector 90° elbow – horizontal – FK 111 plastic | Compatible with 5IX 99290AU | plastic - |
| Connector 90° elbow – vertical – FK 112 plastic | Compatible with 5IX 99290AU | plastic - |
| Flat duct FK 100 plastic | Compatible with 51X 99290AU | plastic - |
| Kit for right air outlet 5Z 9104X1 EG 13991 | Compatible with 5IX 99290AU | |
| Activated carbon filter 5Z 9105X1 EG 13992 | Compatible with 5IX 99290AU | |
| Set of 2 activated carbon filters 5Z 9009LF1 EG 13961 | Compatible with 5IX 99290AU | |

Special accessories for extractor fan hoods

| Stainless steel metallic grease filter 5Z 9203X1 EG 18541 Activated carbon filter 5Z 9102X1 | Compatible with 5DB 69253AU Compatible with 5DB 69253AU | |
|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--|
| Metal handle | Compatible with | |
| 5Z 5750N0 | 5DA 36258AU | |
| Activated carbon filter | Compatible with | |
| 5Z 9121X1 | 5DA 36258AU | |
| JZ JIZINI | 5DA 39258AU | |
| | 5DA 15250AU | |
| | 5DA 17250AU | |
| | 5DA 15151AU | |
| | 5DA 17151AU | |
| Activated carbon filter | Compatible with | |
| 5Z 9100X1 | 5DW 66750AU | |
| JZ 9100A1 | 5DW 69750AU | |
| | 5DA 45450AU | |
| | 5DA 49450AU | |
| Long-life activated carbon filter | Compatible with | |
| | 5DD 72555AU | |
| 5Z 9135X1 | | |

Technical Drawings


Technica Dravi




Ovens

Suitable for oven TU

5B50P 8590GB




5B50N 8590GB




 Suitable for oven BU


 5B50P 8590GB
 5B50N 8590GB



| Suitable for oven TU | |
|----------------------|--------------|
| 5B36P 0250AU | 5B36N 0250AU |
| | |




| Suitable for oven B | U |
|---------------------|--------------|
| 5B36P 0250AU | 5B36N 0250AU |



| Suitable for oven TU | |
|----------------------|--------------|
| 5B20N 0290AU | 5B10N 0240AU |

Range Cooker



Suitable for oven TU

| 5BC 94190AU 5BC 93190AU |
|-------------------------|
|-------------------------|

| , | · |
|-----|-------|
| 895 | 600 C |
| | |
| 8 | |
| | S COO |
| | |
| | |
| | |


Suitable for range cooker | free-standing

5RC 91490AU

see see


| Suitable for oven BU | |
|----------------------|--------------|
| 5B20N 0290AU | 5B10N 0240AU |

Compact appliances




Suitable for compact appliance

Compact appliances




Suitable for compact appliance 5KD 94150GB

Microwaves




| Suitable for microwave | e TU |
|------------------------|-------------|
| 5MA 27500AU | 5MG 17190AU |

Warming drawer




| Suitable for warming drawer | |
|-----------------------------|-----------|
| 5WS 16400 | 5WS 16401 |
| | |


Hobs



| Suitable for hob induction, stand-alone | |
|-------------------------------------------|--|
| 511 94291 | |




| Suitable for hob induction, stand-alor | |
|------------------------------------------|--|
| 5IE 84252 | |




Suitable for hob | induction, stand-alone

Suitable for hob | stand-alone



Suitable for hob | stand-alone


| | • |
|-----------|-----------|
| 5RG 64361 | 5RE 64361 |
| | |





Suitable for hob | stand-alone

5RZ 34411


Gas hobs








Suitable for gas hob 5GB 72290AU




Suitable for gas hob 5GB 61151AU


Ceiling fans



Suitable for gas hob




Stand-alone hob, integrated extractor fan 5IX 99290AU



Suitable for ceiling fan

5DD 72555AU

Flat Hood




Suitable for flat hood

5DA 36258AU


5GB 91250AU

Wall flues



Suitable for wall flue

5DB 69253AU





Technical drawings

Fan module


Suitable for fan module

5DA 45450AU






5DA 49450AU




| Suitable for fan module | |
|-------------------------|--|
| 5DA 15151AU | |
| 5DA 17151AU | |
| | |

Suitable for flat hood 5DA 39258AU

Dishwashers




Suitable for dishwasher | fully integrated



Suitable for dishwasher | fully integrated

5VF 420AU



Suitable for dishwasher | free-standing

5VS 400AU



Service



By opting for Blaupunkt appliances, you have chosen a piece of premium kitchen equipment. Our professional service is available to assist you after the purchase. Our qualified employees are pleased to remain at your disposal. Our customer service experts for Blaupunkt integrated kitchen appliances will professionally answer all questions about the appliances. Here you can obtain all information on handling, functions and performance.

www.blaupunktau.com www.blaupunkt-einbaugeraete.com

Blaupunkt integrated kitchen appliances / customer service, repair service, user support, spare parts and accessories.

Tel.: 1800 252 878 658 1800 BLAUPUNKT

customercare@blaupunktau.com



Register your new device on: blaupunktau.com

Nikpol Pty Ltd

www.nikpol.com.au 1300645765 sales@nikpol.com.au

VIC 6–12 Fairchild Street Heatherton VIC 3202 QLD 19 William Farrior Place Eagle Farm QLD 4009 NSW 2/5 Bessemer Street Blacktown NSW 2148

